

ST. CLAIR COLLEGE

Civil Engineering
Technology

No.	Revision / Issue
1	W16x45 Centered
2	Z-Furring Added
3	Hatch Scale Corrected
4	Drawing Title Added

Project Title:

SHOP & OFFICE

Drawing Title:

WALL SECTION

Drawing By: Bruno Arriola




Checked By: Jie Zhang

Scale: 1/2" = 1'-0"

Date: 11.6.2025

Drawing No.: A5

Sheet No.: A3.1

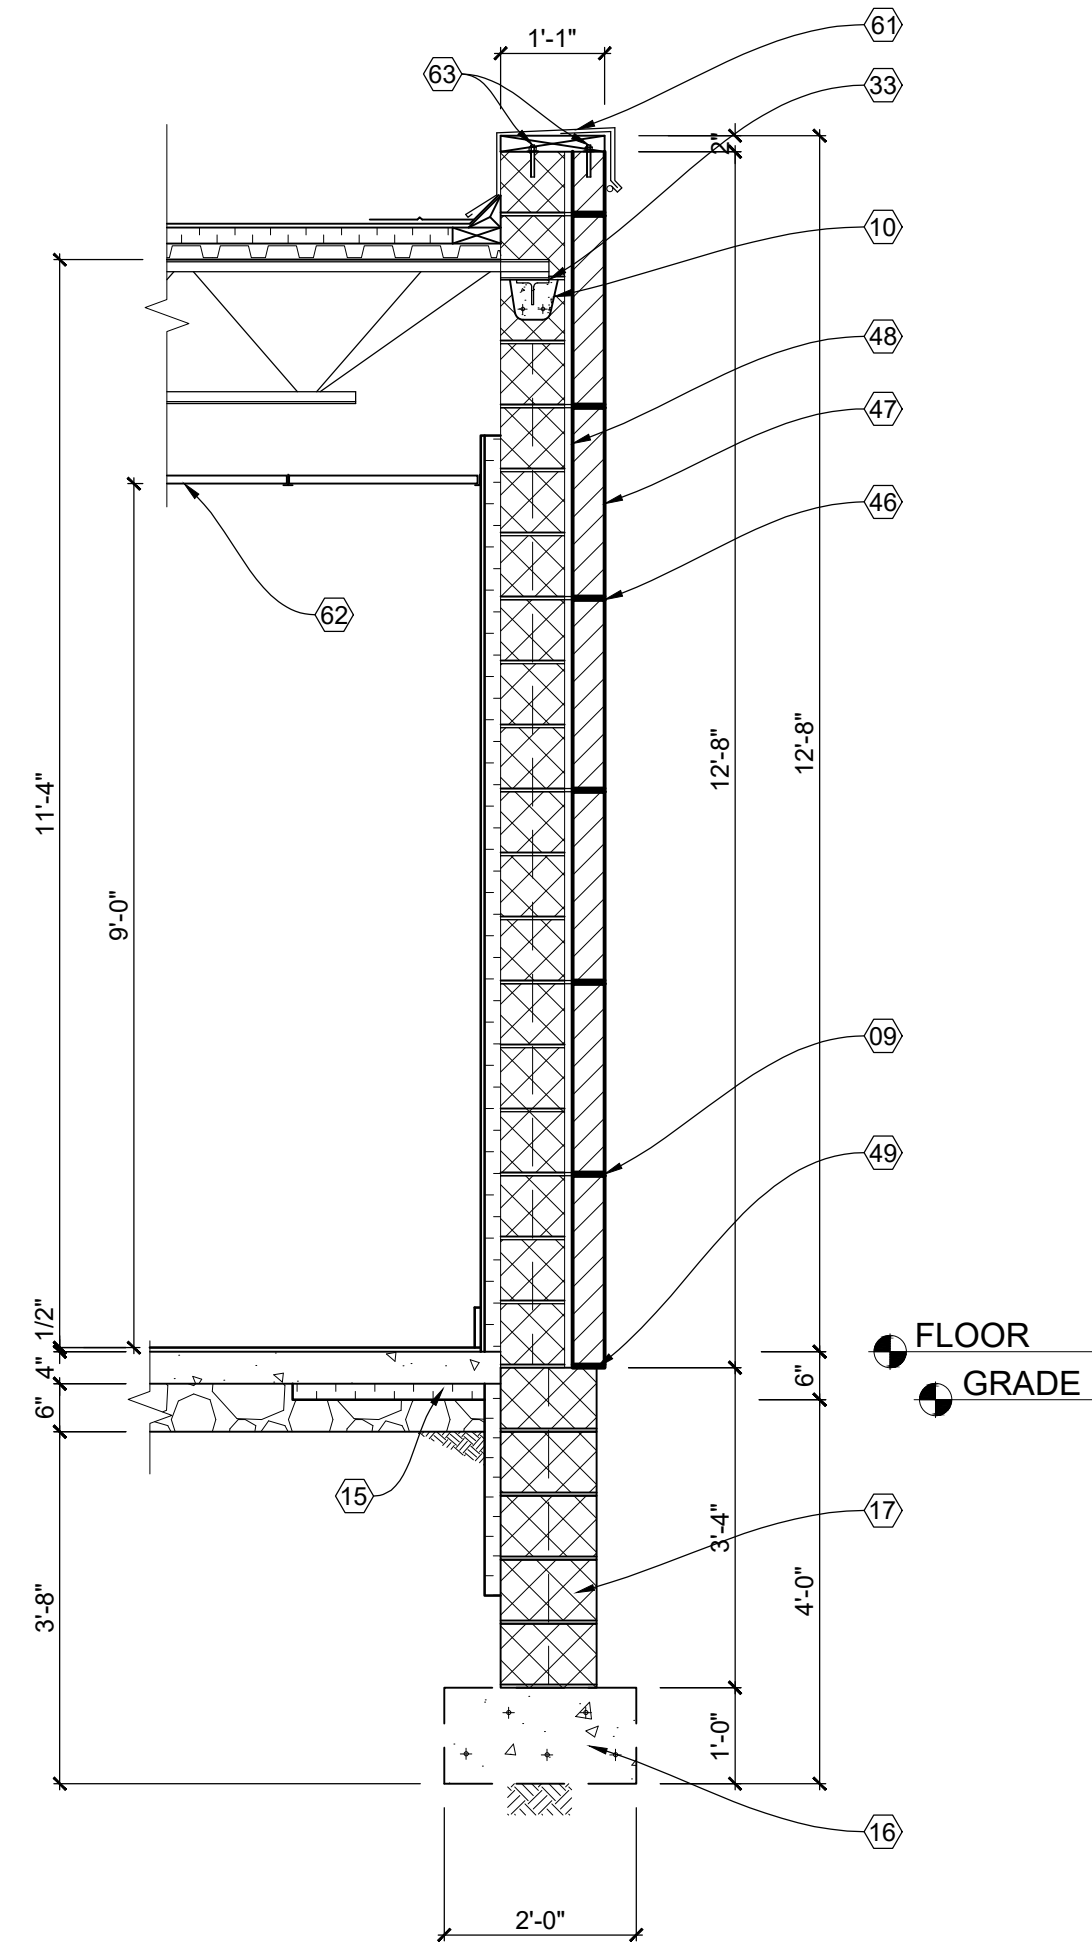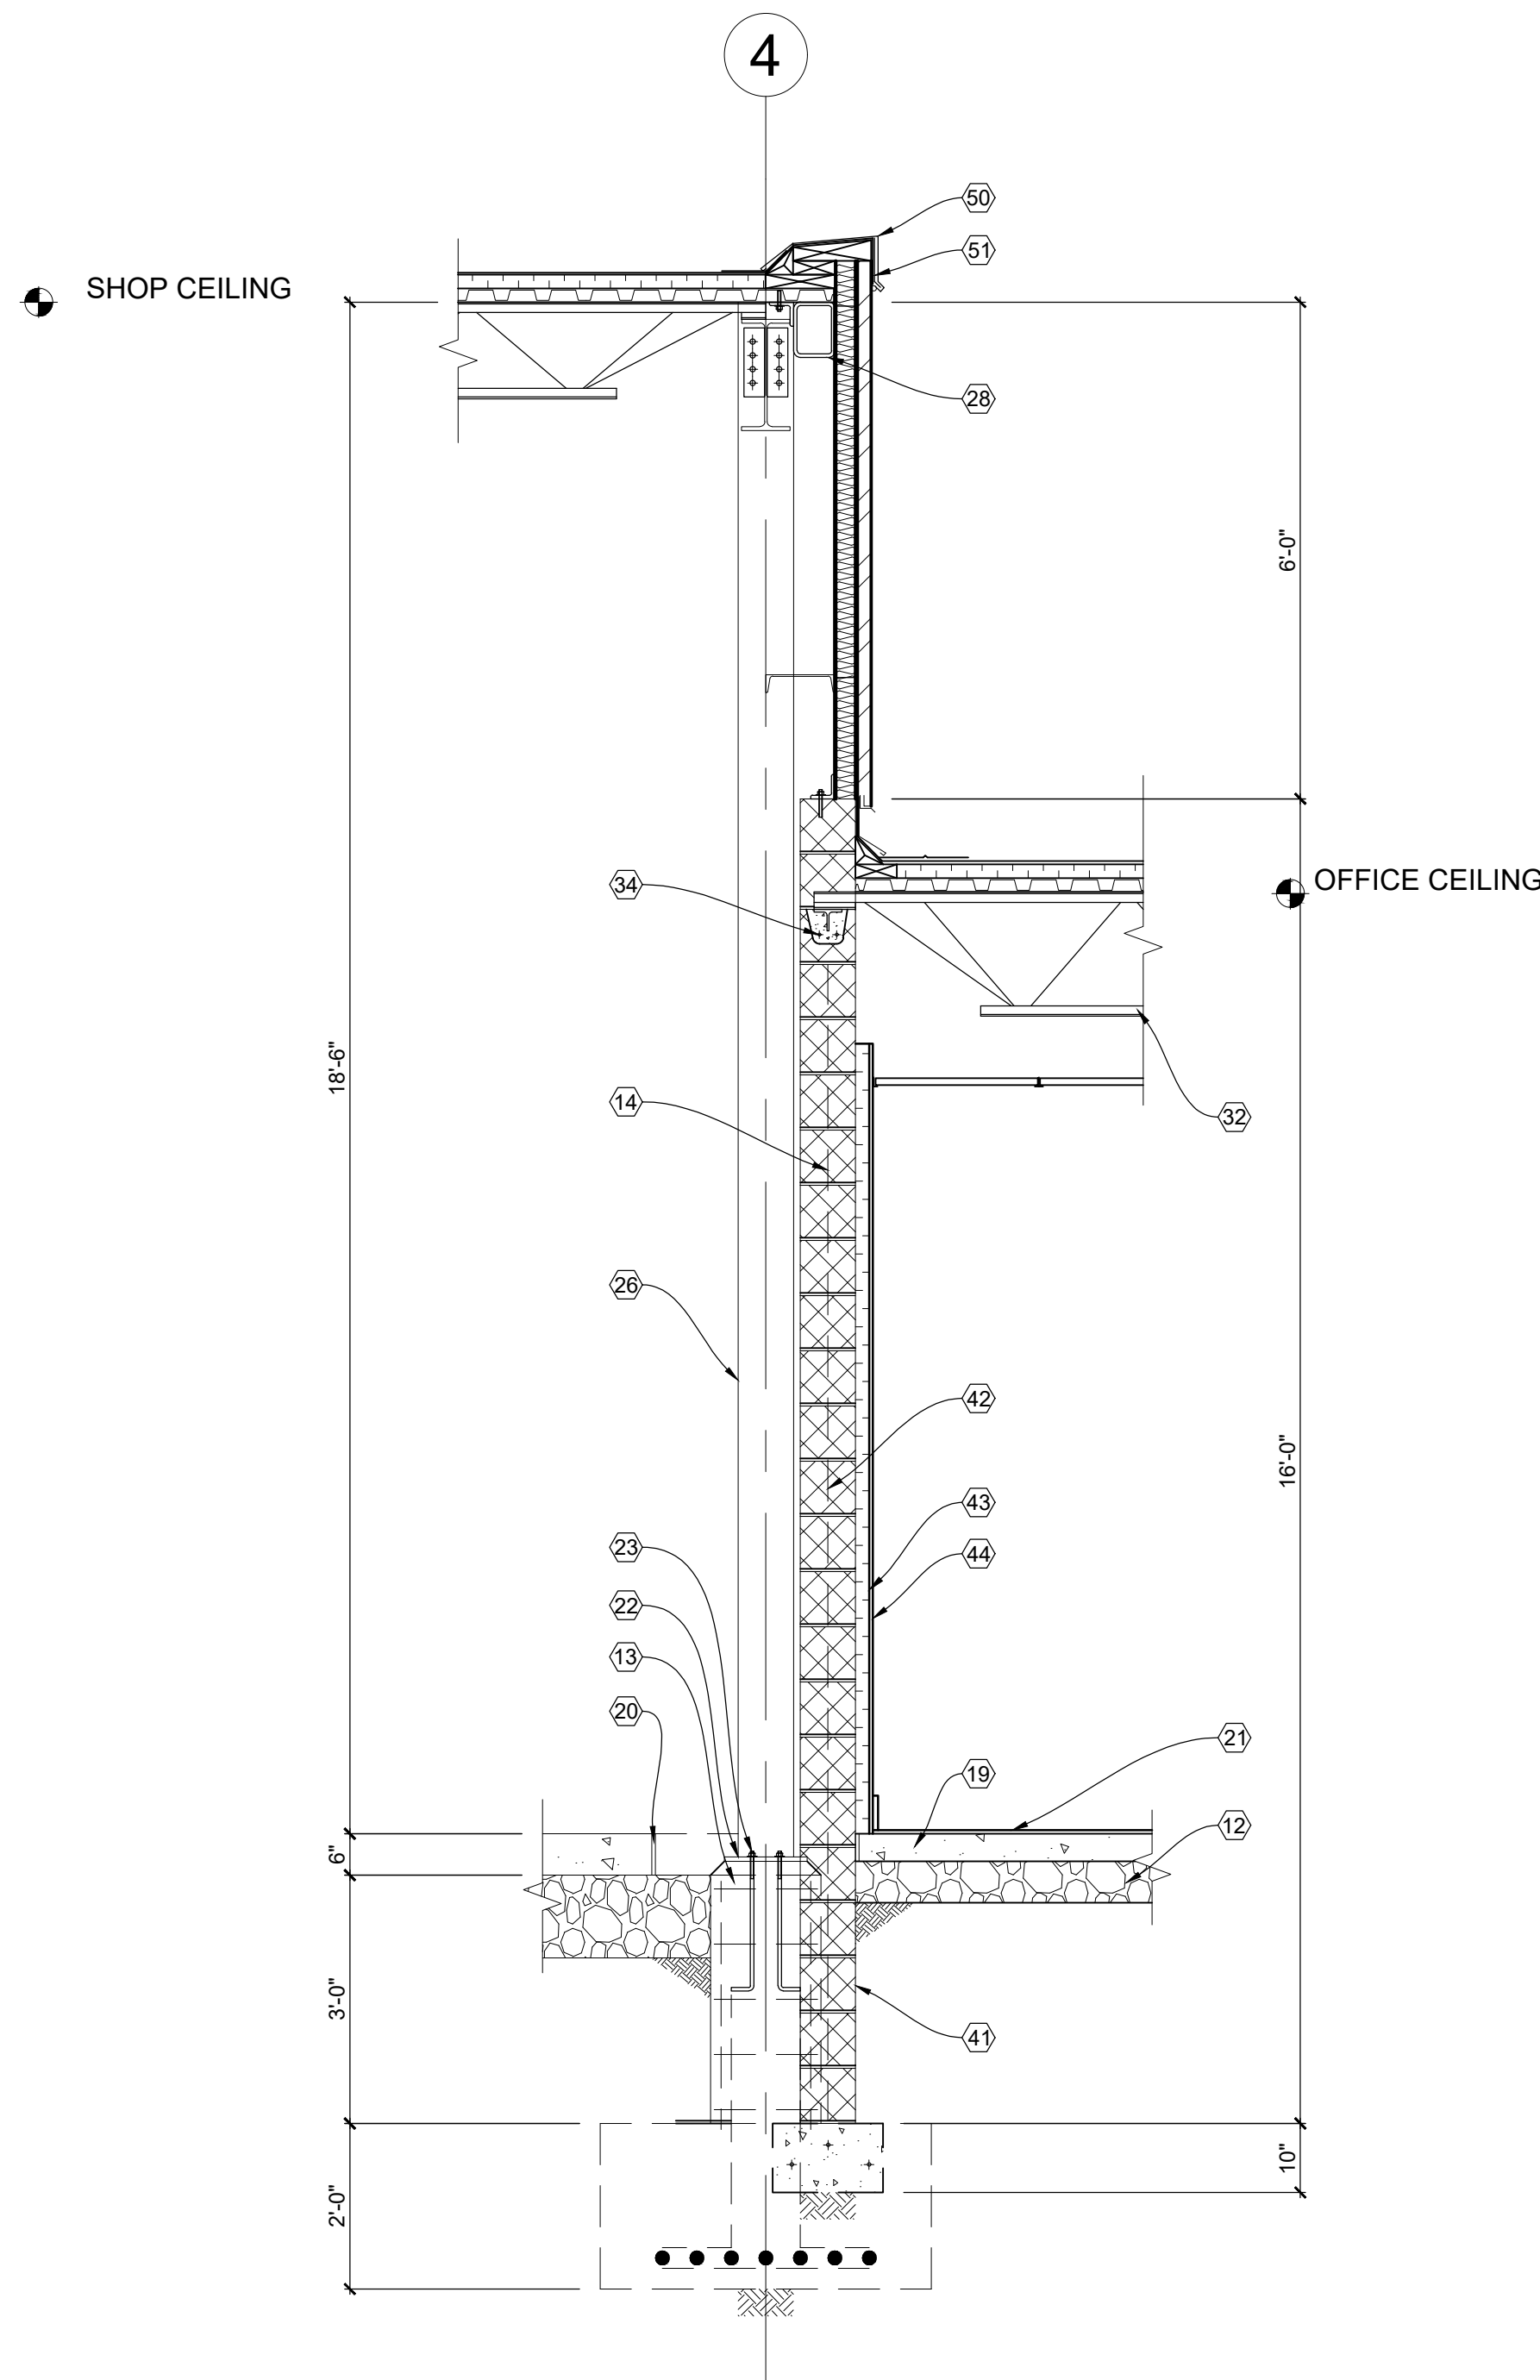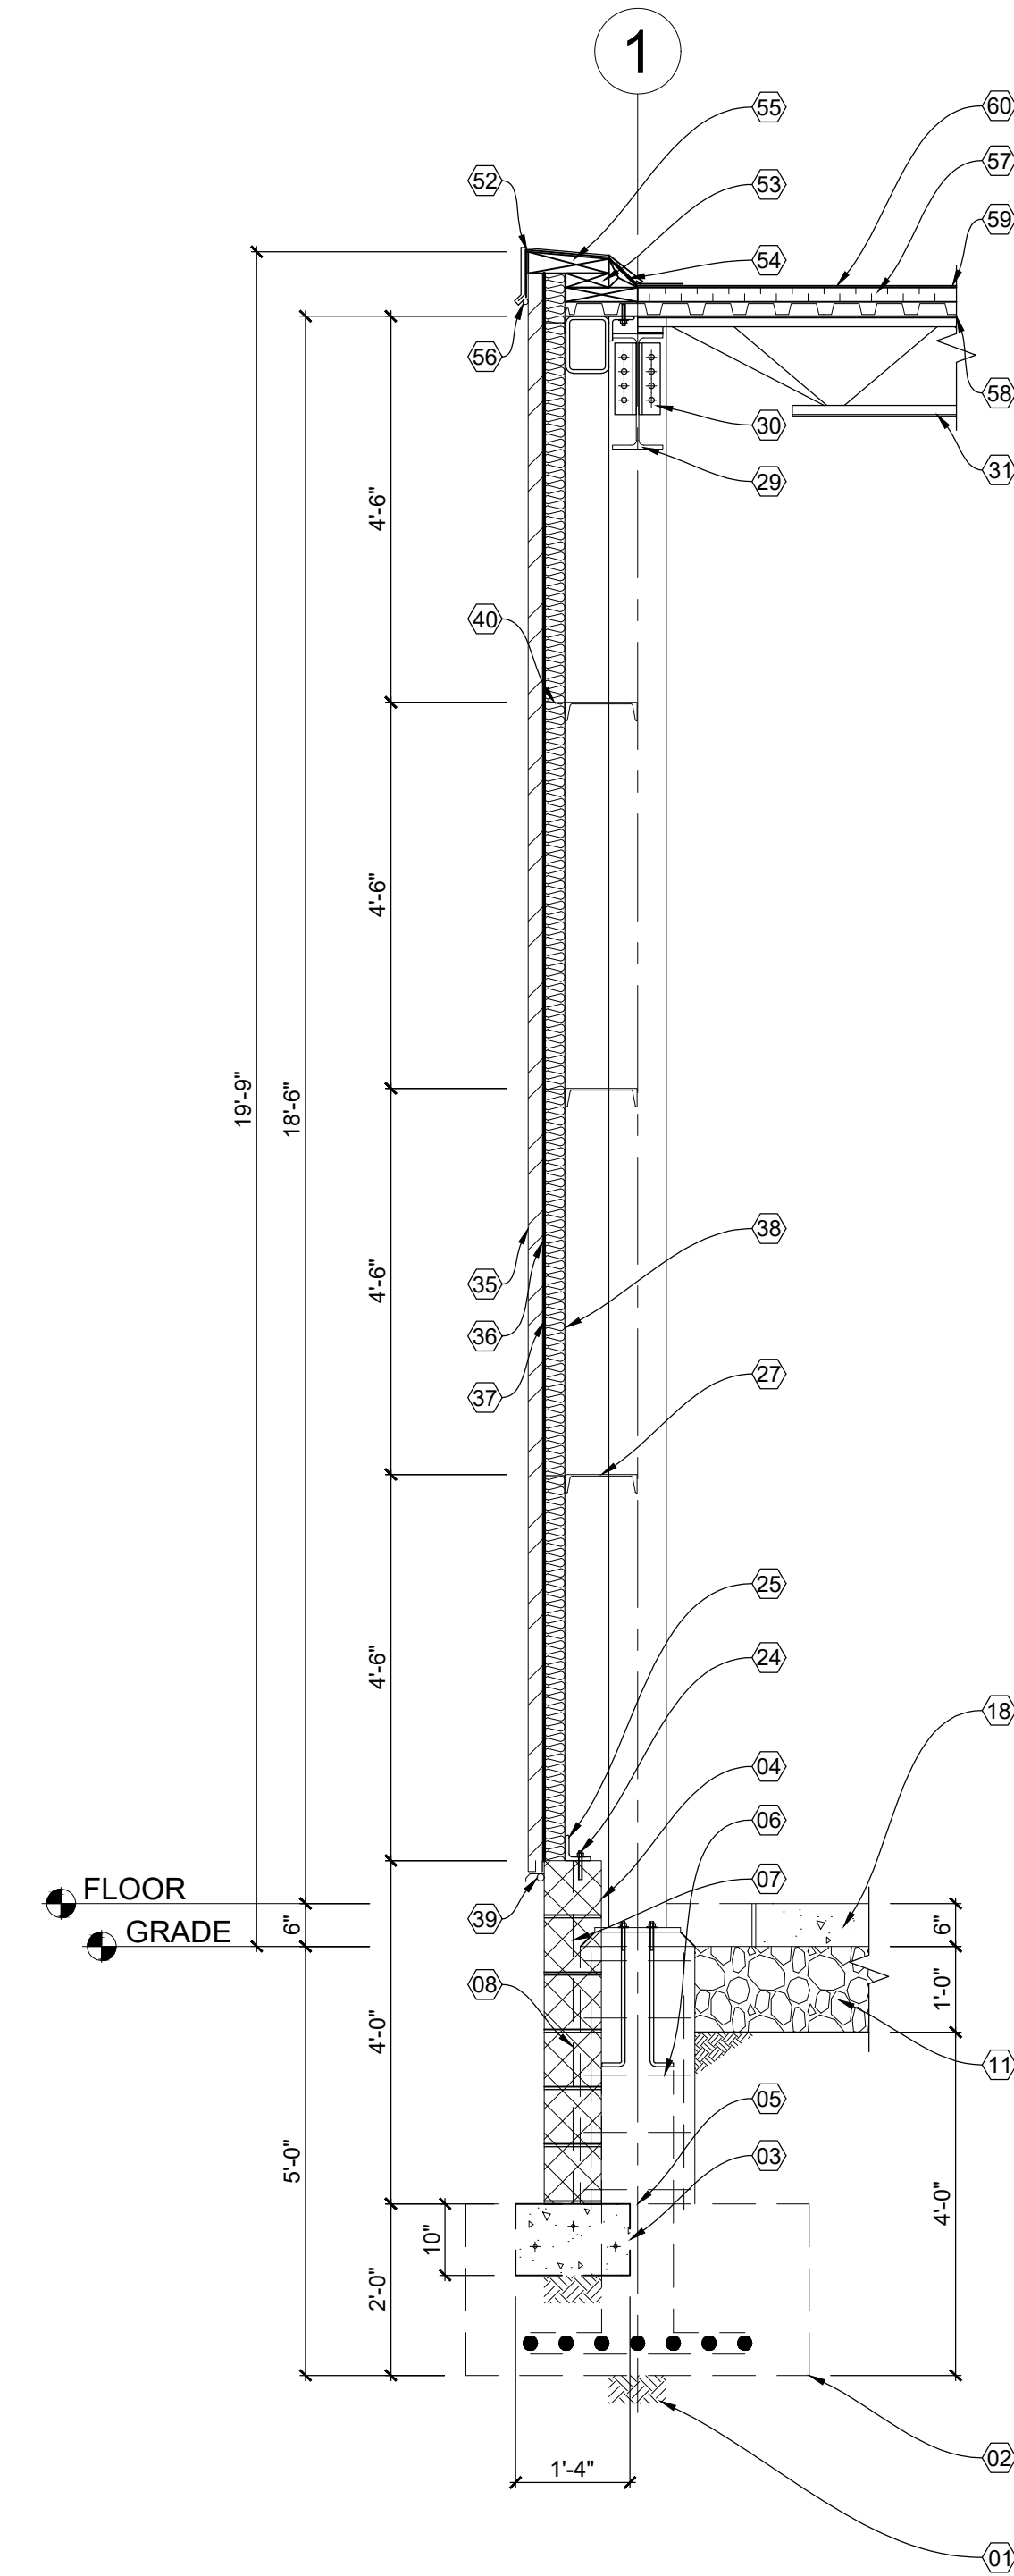

1 WALL SECTIONS

SCALE: 1/2" = 1'-0"

WALL SECTION DETAILS	
No	Content
01	UNDISTURBED SOIL
02	4'-0" x 4'-0" x 2'-0" CONCRETE PIER FOOTING
03	16" WIDE x 10" DEEP CONTINUOUS PERIMETER WALL FOOTING W/1 #4 TOP REBAR & 2 #4 BOTTOM REBAR CONTINUOUS 3" CONCRETE COVER
04	8" x 8" x 16" CONCRETE BLOCK WALLS
05	FILL 1" CLEARANCE W/CONC. BETWEEN BLK. & PIER
06	HORIZONTAL REINF. EACH WAY
07	DOWELS TO MATCH VERTICAL REINF.
08	VERTICAL REINFORCING
09	HORIZONTAL TIES
10	BLOCK FILLED WITH REINF. CONC.
11	12" THICK GRANULAR FILL COMPACTED TO 100% MODIFIED PROCTOR DENSITY (TYP AT PLANT FLOOR)
12	6" GRANULAR FILL
13	1'-4" x 1'-4" x 3'-0" CONC. PIER
14	VERTICAL WALL REINFORCEMENT

15	2" THICK x 2'-0" DEEP PERIMETER FLOOR INSULATION (AT EXTERIOR OFFICE WALLS ONLY)
16	24" WIDE x 12" DEEP CONTINUOUS PERIMETER WALL FOOTING W/2 #4 TOP REBAR & 3 #4 BOTTOM REBAR
17	12" x 8" x 16" CONC. BLOCK FOUNDATION WALL
18	6" THICK CONCRETE SLAB
19	4" THICK CONCRETE SLAB
20	1/2" EXPANSION JOINT
21	1/2" THICK FLOOR TILE
22	1'-0" x 1'-0" x 5/8" BASE PLATE
23	3/4" DIA. ANCHOR BOLTS x 1'-9" LONG
24	1/2" DIA. ANCHOR BOLTS x 4" LONG
25	L 3.5x3.5x0.5 SEAT CLIP
26	W 10x45 COLUMN
27	C 10x15.3 GIRT WELDED TO COLUMN AT EVERY 4'-6" ELEVATION
28	HSS 8x6x0.5 BEAM WELDED TO COLUMN AND L 3.5x3.5x0.5 SEAT CLIP
29	W 16x45 GIRDER

30	10" LONG L 3x3x0.5 SHOP WELDED TO BEAM AND FIELD DOUBLE ANGLE BOLTED WITH 4 x 3/4" DIA. ANCHOR BOLTS TO COLUMN
31	14" K-SERIES OPEN WEB STEEL JOIST 18' SPAN
32	18" K-SERIES OPEN WEB STEEL JOIST 32' SPAN
33	JOIST WELDED TO WT 3x8
34	15 MM REINF. BARS x 2
35	PROFIED METAL CLADDING
36	1/4" AIR SPACE
37	BATT INSULATION
38	1/8" WALL LINER
39	FLASHING
40	Z-FURRING CHANNEL
41	8" x 8" x 16" CONC. BLK WALLS
42	VERTICAL WALL REINFORCEMENT
43	2" THICK PERIMETER RIGID INSULATION
44	1/2" THICK GYPSUM BOARD
46	WALL TIES EVERY 24" VERTICALLY
47	4" x 2-2/3" x 8" FACE BRICK

48	1" AIR SPACE
49	THROUGH WALL FLASHING
50	FORMED METAL COPING
51	CONT. METAL CLEAT
52	ROOF MEMBRANE UNDER COPING
53	PRESERVATIVE-TREATED WOOD BLOCKING
54	TRIANGLE SHAPED PRESERVATIVE-TREATED WOOD STRIP
55	CONT. WOOD BLOCKING SLOPED 1" PER FOOT . MIN.
56	SEALANT
57	RIGID INSULATION
58	1-1/2" WIDE RIB METAL DECK
59	ROOF MEMBRANE
60	MEMBRANE BASE FLASHING TO EXTEND AT LEAST 8" OVER MEMBRANE
61	SLOPED STANDING-SEAM SHEET-METAL COPING
62	1" CEILING
63	ANCHOR BOLT X 2